

GATEKEEPER®

FS-5

Day / Night High Resolution Camera

**Discreet.
Super Compact.
Stunning Video Quality.**



Video

Imaging Sensor	Sony Super HAD II, 1/3" CCD
Processor	Sony
Minimum Illumination	0.1LUX/F1.2 (no IR), 0.0 LUX (IR On)
Resolution	600 TVL
Effective Pixels	758 (H) x 594 (V)
Video Output	1.0V P-P/75Ω, NTSC
S/N Ratio	≥50db (AGC Off)
Electronic Shutter	1/60 to 1/10,000
Gamma Correction	0.45
AGC	Auto
BLC	Auto
White Balance	Auto

Voltage

Power Consumption: 12v nominal
≤3W with IR On

Physical

Exterior Dimensions	(Ø x H) 3.1" x 2.4" (77mm x 60.3mm)
Weight	.5 lbs (200 g)
Operating Temperature	-22°F to +131°F (-30°C to +55°C)
Operating Humidity	Under 90% (Non-Condensing)

Pan	±180°
Tilt	0° to 62° when flush mounted or using 0° surface mount adaptor

Adaptor Plates:	15° to 77° with 15° adaptor plate 25° to 87° with 25° adaptor plate
-----------------	--

Audio

Yes - integrated mic and line driver

IR


10 LED's (850nm) with integrated on/off sensor IR Range: 10 feet (3 meters)

Available Lenses

2.9 mm, 3.6 mm, 4.3 mm, 6.0 mm, 8.0 mm, 12.0 mm and 16.0mm

Camera Placement

Recommended camera placement and field of view:

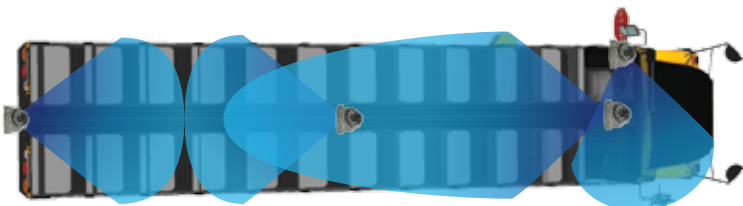

Distributed By:

Specifications subject to change without notice.

GATEKEEPER

Simple Video Management Solutions

Gatekeeper Systems, Inc.
www.gatekeeper-systems.com
sales@gatekeeper-systems.com
Toll Free: 1.888.666.4833

#301-31127 Wheel Avenue
Abbotsford, BC V2T 6H1
Tel: 1.604.864.6187
Fax: 1.604.864.8490